



**Verified Carbon
Standard**

THE PHILIPPINES VWT IMPROVED COOKSTOVE PROGRAM I

Document Prepared by Guangzhou Iceberg Environmental Consulting Services



冰川环境
Co., Ltd.

Project Title	The Philippines VWT Improved Cookstove Program I
Version	01
Date of Issue	29/03/2023
Prepared By	Guangzhou Iceberg Environmental Consulting Services Co., Ltd.
Contact	Address: No.106 Fengze East Road, Nansha District, Guangzhou, China Telephone: +8613560420840 Email: baoji@icebergchina.com ; hanjin@icebergchina.com

CONTENTS

1	PROJECT DETAILS	4
1.1	Summary Description of the Project.....	4
1.2	Sectoral Scope and Project Type	4
1.3	Project Eligibility	5
1.4	Project Design.....	5
1.5	Project Proponent	5
1.6	Other Entities Involved in the Project	5
1.7	Ownership	6
1.8	Project Start Date	6
1.9	Project Crediting Period.....	6
1.10	Project Scale and Estimated GHG Emission Reductions or Removals.....	6
1.11	Description of the Project Activity.....	7
1.12	Project Location	8
1.13	Conditions Prior to Project Initiation	9
1.14	Compliance with Laws, Statutes and Other Regulatory Frameworks	9
1.15	Participation under Other GHG Programs.....	9
1.16	Other Forms of Credit.....	10
1.17	Sustainable Development Contributions.....	10
1.18	Additional Information Relevant to the Project	12
2	SAFEGUARDS.....	12
2.1	No Net Harm	12
2.2	Local Stakeholder Consultation	13
2.3	Environmental Impact.....	14
2.4	Public Comments	14
2.5	AFOLU-Specific Safeguards	14
3	APPLICATION OF METHODOLOGY	14
3.1	Title and Reference of Methodology.....	14
3.2	Applicability of Methodology.....	14
3.3	Project Boundary	16
3.4	Baseline Scenario	18
3.5	Additionality.....	18

3.6	Methodology Deviations	19
4	QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS	19
4.1	Baseline Emissions	19
4.2	Project Emissions	19
4.3	Leakage	19
4.4	Net GHG Emission Reductions and Removals	19
5	MONITORING	24
5.1	Data and Parameters Available at Validation	24
5.2	Data and Parameters Monitored.....	28
5.3	Monitoring Plan.....	31

1 PROJECT DETAILS

1.1 Summary Description of the Project

The project involves distribution of fuel-efficient VWT improved cookstoves (hereinafter referred to as “ICSs”) in the Republic of The Philippines. The ICSs disseminated through this project will replace the old low efficient baseline cookstoves in rural are of the Philippines. The ICSs will be produced by local factories.

Through this project, Guangzhou Iceberg Environmental Consulting Services Co., Ltd. (hereinafter referred to as “Iceberg”) will distribute approximately 200,000 ICSs free of charge to households in the rural area of the Philippines.

Before the implementation of the project, local people mostly used traditional solid-fuel cooking solutions such as open fire. They spent plenty of time to collect firewood every day due to low combustion efficiency of baseline cooking devices. The ICSs will burn wood more efficiently thereby improving thermal transfer to pots, hence saving firewood. The project will reduce the GHG emission by less non-renewable firewood combustion as well as slowing the rapidly progressing deforestation in the Philippines.

The baseline scenario existing prior to the implementation of the project is widely used traditional solid-fuel cooking solutions such as open fire. Due to low income, people will continue to use them to meet thermal energy needs without project activity.

The average annual GHG emission reduction from the project is expected to be 708,235 tCO₂e, the crediting period is expected to be 10 years. The total GHG emission reduction is 7,082,351 tCO₂e.

Audit Type	Period	Program	VVB Name	Number of years
Validation		VCS	Shenzhen CTI International Certification Co., Ltd (CTI)	-
	Year...			
Total				

1.2 Sectoral Scope and Project Type

The project is categorised under type/category as below:

- a) Sectoral scope: 03 - Energy demand
- b) Type: II – Energy efficiency improvement projects

The project is not a grouped project.

1.3 Project Eligibility

The project involves replacing traditional cooking solutions with fuel-efficient improved cookstoves which falls into the category of efficiency improvements in thermal applications. According to VCS Standard Version 4.4, efficiency improvements in thermal applications (e.g., cook stoves) are not excluded, therefore, it is eligible under the scope of VCS Program.

1.4 Project Design

- ☐ The project includes a single location or installation only
- ☒ The project includes multiple locations or project activity instances, but is not being developed as a grouped project
- ☐ The project is a grouped project

Eligibility Criteria

Not applicable because the project activity is not a grouped project.

1.5 Project Proponent

Organization name	Guangzhou Iceberg Environmental Consulting Services Co., Ltd.
Contact person	Ji BAO
Title	General Manager
Address	No.106 Fengze East Road, Nansha District, Guangzhou, China
Telephone	+8613560420840
Email	baoji@icebergchina.com; hanjin@icebergchina.com

1.6 Other Entities Involved in the Project

No other entities involved.

1.7 Ownership

The project ownership belongs to Guangzhou Iceberg Environmental Consulting Services Co., Ltd.

The ICSs are distributed to end users (Households) free of charge. The end users are informed in advance that the use of ICS generates carbon finance which in turn is used to cover the cost of ICS production and distribution. The participating households, ICS manufacturers and distributors as well as Iceberg will sign donation and carbon transfer agreements to the ownership of the carbon assets generated from this project belongs to Iceberg. The agreement has been submitted to confirm that cook stove ownership is with Guangzhou Iceberg Ltd.

1.8 Project Start Date

05/11/2022

1.9 Project Crediting Period

10 years fixed crediting period from 05/11/2022 to 04/11/2032.

1.10 Project Scale and Estimated GHG Emission Reductions or Removals

Project Scale	
Project	
Large project	X

Year	Estimated GHG emission reductions or removals (tCO ₂ e)
Year 2022	6,408
Year 2023	335,523
Year 2024	785,838
Year 2025	855,600
Year 2026	741,547
Year 2027	652,799
Year 2028	707,202
Year 2029	853,796

Year 2030	855,600
Year 2031	741,547
Year 2032	546,491
Total estimated ERs	7,082,351
Total number of crediting years	10
Average annual ERs	708,235

1.11 Description of the Project Activity

Before the implementation of the project, local people in the project location use traditional solid-fuel cooking solutions such as open fire. The project will distribute 200,000 fuel-efficient improved cookstoves (ICS) in 2 years to replace the baseline cookstoves in households.

The ICS will continue to consume non-renewable biomass for cooking, but the ICS will consume less wood fuel to meet thermal needs as it has higher thermal efficiency and it will result in a reduction of GHG emissions compared to the baseline scenario.

Technology

The type of ICS distributed in the project is VWT improved cookstove. According to independent stove efficiency tests performed by Institute of Fuel Research & Development in Bangladesh on the VWT improved cookstove, the thermal efficiency is 34.0%.

Table 1: Technical Specification of VWT Improved Cookstove

No.	Parameter	Value
1	High power thermal efficiency	34.0%
2	Dimensions	25cm height(± 0.5 cm), 26cm diameter(± 0.5 cm)
3	Weight	13 kg(± 1 kg)
4	Material	Cement and wire mesh
5	Life span	10 Years

All ICSs will be produced in local factories, and then they will be distributed to households free of charge.



Figure 1: Photo of VWT ICS

The lifetime of VWT improved cookstove is about 10 years according to manufacturer specifications. In the sixth year after ICSs distribution, the project proponent plan to provide a new ICS to households without cost, so that households will have access to them for the full crediting period.

1.12 Project Location

The project location will be in the Republic of The Philippines.

Table 2: Geographical coordinates of the Republic of The Philippines

Orientation	Latitude/Longitude
East	126° 35' 26.6"E
West	117° 01' 18.3"E
South	5° 04' 45.5"N
North	18° 36' 27.5"N



Figure 2: Map of the Republic of The Philippines

1.13 Conditions Prior to Project Initiation

The condition prior to project initiation is the continued use of non-renewable wood fuel (firewood) by the target population to meet similar thermal energy needs as provided by project cookstoves in absence of project activity

1.14 Compliance with Laws, Statutes and Other Regulatory Frameworks

After searching, there are no laws and regulations about the application of improved cookstoves in the Philippines households. The project is voluntarily implemented by the project proponent.

1.15 Participation under Other GHG Programs

1.15.1 Projects Registered (or seeking registration) under Other GHG Program(s)

The project has not been registered, nor is it seeking registration under any other GHG program.

1.15.2 Projects Rejected by Other GHG Programs

The project has not been rejected by any other GHG program.

1.16 Other Forms of Credit

1.16.1 Emissions Trading Programs and Other Binding Limits

The project is not included in any emissions trading program or any other mechanism that includes GHG allowance trading.

1.16.2 Other Forms of Environmental Credit

The project has not sought or received another form of GHG-related credit, including renewable energy certificates.

Supply Chain (Scope 3) Emissions

Not applicable. The manufacturer of the cookstoves has signed Donation and Carbon Transfer Agreements to declare that the ownership of the carbon assets generated from this project belongs to Iceberg.

1.17 Sustainable Development Contributions

Before the implementation of the project, local people in the project location use non-renewable biomass for cooking with open fire. The project will distribute fuel-efficient ICS to replace the baseline cookstoves in households. The project will enable and enhance households to achieve several sustainable development goals:

Goal 1: No poverty

Improved cookstove is a basic service necessary to lead a healthy and productive life, including saving time and money for wood fuel at the household level. The project proponent will distribute 200,000 ICSs, and the ICSs are produced in local factories. Hence the implementation of the project will result in more job opportunities and higher income for local residents.

Goal 2: Zero hunger

The project will improve food security and nutrition status, particularly for children and women by reducing inadequate cooking, the burden of firewood collection, the time for preparing food, the need to buy firewood.

Goal 3: Good health and well-being

Most of non-renewable biomass local people used for cooking are firewood, which will generate high PM2.5 and high CO biomass smoke when incompletely burnt. By using ICS, it will reduce people's exposure to high PM2.5 and high CO due to higher efficiency of combustion leading to faster cooking and more complete combustion. It will also reduce the burn risk, significant to children and toddlers due to enclosure of the fire in the combustion chamber.

Goal 4: Quality education

The project will reduce the time spend on firewood collection for children, especially for girls, it will increase their time for education. The implementation of project needs plenty local people participate in production, distribution or use steps, they will get relevant skills and sustainable development and global citizenship education through training by project proponent.

Goal 5: Gender equality

The project will reduce women and children's drudgery through time savings in reducing time spent cutting, collecting, and carrying firewood from trees far removed from households and reduce time spent cooking over toxic smoky open fires. These tasks, if being undertaken without relief, are a major cause of gender inequality.

Goal 6: Clean water and sanitation

Clean cooking technology provides an essential tool to addressing energy poverty and ensuring sustainable energy security in approximately 200,000 the Philippines households during the project lifecycle. It will also reduce the smoke and GHG emissions during water boiling.

Goal 7: Affordable and clean energy

The ICS distributed to Household is a clean cooking technology. The project will increase the proportion of population with primary reliance on clean cooking technology in project area.

Goal 8: Decent work and economic growth

The factories which produce ICS are local enterprises. They will hire more workers to produce ICSs for the project. During the project crediting period, the project proponent and its local partners will in charge of maintenance and monitoring plan, which will create working opportunities for local people.

Goal 9: Industry, Innovation, and Infrastructure

The local factories which produce ICS for project are small-scale industries. They will expand production capacity to satisfy the needs. Thus, the upstream and downstream supply chain will benefit from the project. Many of the workers hired by the factories for the project were peasants before. So the project will increase manufacturing employment.

Goal 13: Climate action

The average annual GHG emission reduction from the project is expected to be 708,235 tCO₂e due to less non-renewable firewood combustion for cooking and heating in the households.

Goal 15: Life on land

The project will help local people consume less firewood as the ICS has higher thermal efficiency and it will result in a reduction of GHG emissions compared to the baseline scenario. It will also help reduce deforestation and protect biodiversity and natural habitats in the Philippines.

1.18 Additional Information Relevant to the Project

Leakage Management

Not applicable as the project adopts a net gross adjustment factor of 95% to account for leakage.

Commercially Sensitive Information

No commercially sensitive information has been excluded from the public version of the project description.

Further Information

No further information.

2 SAFEGUARDS

2.1 No Net Harm

During the local stakeholder consultation, the following economic, social and environmental impacts of the project were identified:

Economic impacts:

- The project will reduce expenditures of households on firewood.
- The project will contribute to the scale-up of local businesses and organizations with the potential to create jobs during the project, such as the production, marketing, distribution, and maintenance of VWT improved cookstoves.

Social impacts:

- The project helps to provide a safe and hygienic kitchen environment. There is evidence that air pollution is one of the main factors leading to pulmonary dysplasia, pneumonia, and low birth weight in children.

- The project will contribute to the health of women and children. Women and young children spend the longest time by the stove and are particularly exposed to soot particles.

Environmental impacts:

- The project will help significantly reduce greenhouse gas emissions from cooking with firewood or other fuels.

- The using of traditional cookstove will produce a lot of smoke and harmful gases. The project will reduce indoor air pollution, thus reducing respiratory illness and mortality rates, especially among women and children.

- The project reduces the demand for non-renewable biomass required for the use of cookstoves, which can protect natural forest ecosystems and benefit biodiversity.

Therefore, no potential negative environmental or socio-economic impacts have been identified for the project.

2.2 Local Stakeholder Consultation

Local people, communities and or representatives who are directly or indirectly affected by the project, such as end-users, stove manufacturer, local NGOs and local officials were identified as stakeholders. Iceberg also identified and encouraged anyone who were interested in the project to attend the local stakeholder consultation. Iceberg and its local partner invited local authorities, end-users, stove manufacturer and local non-governmental organisations (NGOs) to participate in the local stakeholder consultation.

Stakeholder consultation meeting was held on 05/11/2022 at Bray. San Vicente, Butuan City, Agusan del Norte Province, Caraga Region of the Philippines. For introduce the project and collect opinions from all the types of stakeholders identified above, various inviting methods were applied for the stakeholder consultation meeting. For the convenience of end-users, an invitation in both English and Filipino was sent to them through broadcast in villages to make sure everyone can understand. Some local people were invited by phone call. For national government officials, local and international NGOs, women groups, local officers and entrepreneurs, invitation letters were sent to them as formal invitation or by email.

In the meeting, after welcoming the participants, all authorized people who were present for the meeting introduced themselves respectively. The explanation was also focusing on the benefit of the ICS to enable local people at rural area to have access to save money, energy and

to protect environment by reducing wood fuel consumption needed for cooking. Meeting minutes was used for documenting the outcomes of the local stakeholder consultation. Another method used was evaluation form. After the meeting, Iceberg and local partner distributed evaluation forms to attenders, and received 5 forms. All of them expressed positive opinions about the proposed project.

Besides the stakeholder consultation meeting, the project implementers have continuously visited different areas to collect the opinions from other stakeholders. Opinion books have also been put in the villages where the project has been implemented for continuous feedback and on-going communication.

2.3 Environmental Impact

No negative environmental impacts have been identified from the project. So environmental impact assessment is not required for the project.

2.4 Public Comments

This section will be updated after the period for public comments. .

2.5 AFOLU-Specific Safeguards

This section is not applicable as the project is a non-AFOLU project.

3 APPLICATION OF METHODOLOGY

3.1 Title and Reference of Methodology

Methodology:

VMR0006 Methodology for Installation of High Efficiency Firewood Cookstoves, Version: 1.1

TOOL30: Calculation of the fraction of non-renewable biomass, version 04.0

3.2 Applicability of Methodology

The project activity meets each of the applicability conditions:

No.	Applicability criterion	How the project complies
1	Project activities shall be implemented in domestic premises, or in community-based kitchens.	The project activity will replace traditional wood-based stove (mainly three stone) in individual households only.

2	The project stove shall have specified high-power thermal efficiency of at least 25% per the Manufacturer's Technical Specifications and shall exclusively use woody biomass and can be single pot or multi-pot; in case of project stove replacing fossil fuel baseline stove, it shall exclusively use renewable biomass.	The VWT improved cookstove has a specified high-power thermal efficiency of 34.0% as per the Manufacturer's Technical Specifications. It uses non-renewable biomass only.
3	Both 'Projects' and 'Large Projects' can use this methodology.	Since the average annual GHG emission reduction from the project is expected to be 708,235 tCO ₂ e, it is not a large project as per Paragraph 3.10.1 of VCS Standard (Version 4.4).
4	Non-renewable biomass has been used in the project region since 31 December 1989, using survey methods or referring to published literature, official reports or statistics.	According to Global Forest Resources Assessment 2010 Report of The Philippines by Food and Agriculture Organization of the United Nations ¹ , the area of forests of the Philippines in 1990, 2000 and 2010 respectively is 7778*10 ³ , 7309*10 ³ and 6839*10 ³ hectares, it has decreased 12.07% from 1990 to 2010. Since the Philippines is a developing country in Southeast Asia, it is highly possible that non-renewable biomass has been used before 1990 across the Philippines.
5	For the specific case of biomass residues processed as a fuel (e.g. briquettes, wood chips), it shall be demonstrated that: (a) It is produced using exclusively renewable biomass (more than one type of biomass may be used). (b) The consumption of the fuel should be monitored during the crediting period and (c) Energy use for renewable biomass processing (e.g. shredding and compacting in the case of	<p>The ICS is introduced as energy efficiency measure to replace baseline stoves and reduce the use of non-renewable biomass for combustion.</p> <p>The consumption of the fuel used in the project activity will be monitored.</p> <p>If briquettes utilization in project case the energy consumption for manufacturing of briquettes and transportation of</p>

¹ <https://www.fao.org/forest-resources-assessment/fra-2020/country-reports/en/>

	briquetting) may be considered as equivalent to the upstream emissions associated with the processing of the displaced fossil fuel and hence disregarded.	briquette will be monitored to calculate project emissions.
--	---	---

3.3 Project Boundary


Source		Gas	Included?	Justification/Explanation
Baseline	Emission from use of non-renewable biomass	CO ₂	Yes	Major source
		CH ₄	Yes	Major source
		N ₂ O	Yes	Major source
		Other	No	No other source identified
	Production & Transport of Fuel	CO ₂	Yes	Can be a major source
		CH ₄	Yes	Can be a major source
		N ₂ O	Yes	Can be a major source
		Other	No	No other source identified
Project	Emission from use of nonrenewable biomass/Fossil fuel	CO ₂	Yes	Major source
		CH ₄	Yes	Major source
		N ₂ O	Yes	Major source
		Other	No	No other source identified
	Production & Transport of Fuel	CO ₂	Yes	Can be a major source
		CH ₄	Yes	Can be a major source
		N ₂ O	Yes	Can be a major source
		Other	No	No other source identified

The project boundary is shown below:



Figure 3: Project boundary is across the Philippines

A diagram of the energy flow in baseline boundary and project boundary is shown below:

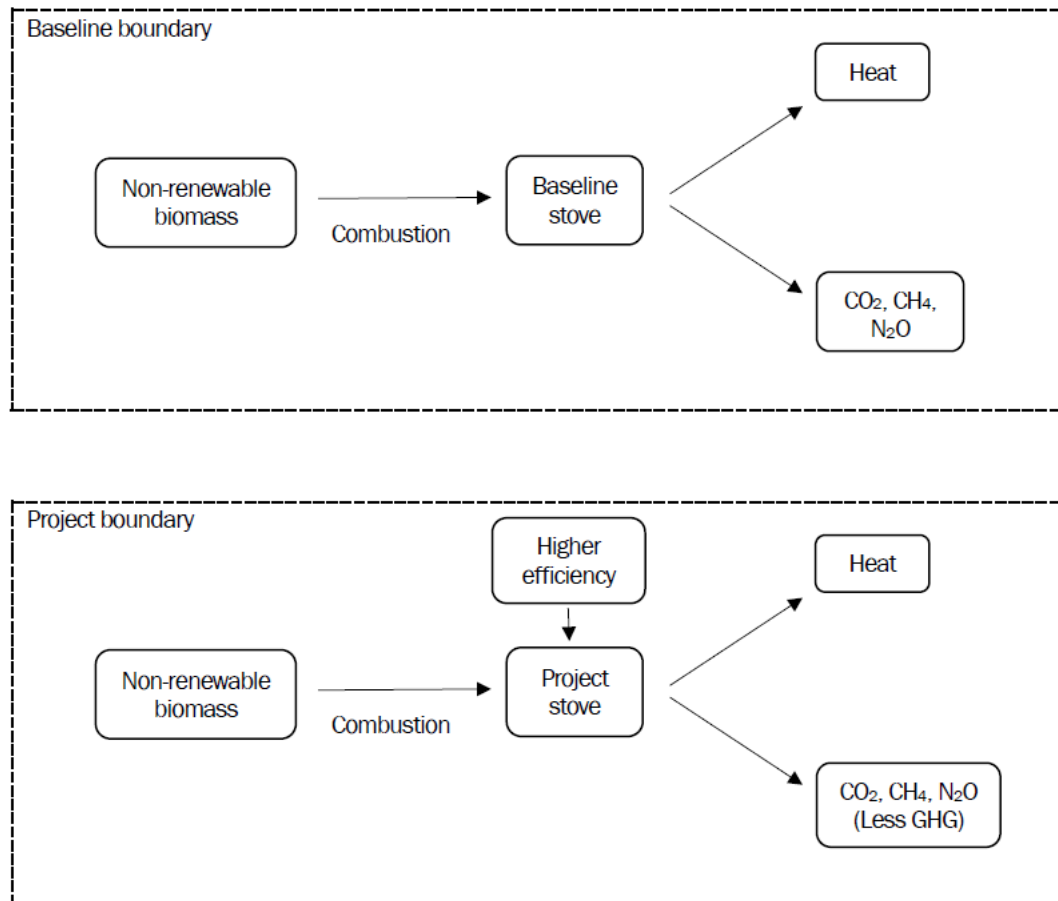

3.4 Baseline Scenario

The baseline scenario is the continued use of non-renewable wood fuel (firewood) by the target population to meet similar thermal energy needs as provided by project cookstoves in absence of project activity.

3.5 Additionality

The methodology uses activity method for the demonstration of additionality.

Step 1: Regulatory Surplus

The project is not mandated by any law, statute or other regulatory framework in the host country, or for UNFCCC non-Annex I countries, any systematically enforced law, statute or other regulatory framework.

The project is implemented by Iceberg as well as its local partners and participated by local households voluntarily.

Step 2: Positive List

As per Section 3.2 of the PD, the project meets all the applicability conditions of the methodology which represent the positive list.

The ICSs are distributed at zero cost to local households. The project is not implemented as part of government schemes or supported by multilateral funds. Iceberg undertakes all the expenditures for project implementation and has no other source of revenue other than the sale of GHG credits.

Conclusion: As the project meets the conditions above, it is deemed additional as per the applied methodology.

3.6 Methodology Deviations

The project did not apply any methodology deviations.

4 QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS

4.1 Baseline Emissions

The applied methodology does not account for baseline emissions separately, but instead quantifies emission reductions as a function of the reduction in the amount of non-renewable biomass fuel consumption in the efficient project stoves as compared to baseline stoves. Please refer to Section 4.4 of the PD.

4.2 Project Emissions

The applied methodology does not account for project emissions separately, but instead quantifies emission reductions as a function of the reduction in the amount of non-renewable biomass fuel consumption in the efficient project stoves as compared to baseline stoves. Please refer to Section 4.4 of the PD.

4.3 Leakage

Leakage shall be considered as default 0.95 in accordance with the applied methodology.

4.4 Net GHG Emission Reductions and Removals

The project activity will replace traditional wood-based stove with ICS, therefore net GHG emission reductions are calculated by applying Equations 1 and 2.

$$ER_y = \sum_i \sum_j ER_{y,i,j} \quad \text{Equation (1)}$$

Where:

- i = Indices for the situation where more than one type/model of improved cook stove is introduced to replace three-stone fire
- j = Indices for the situation where there is more than one batch of improved cook stove of type i
- ER_y = Emission reductions during year y in t CO₂e
- $ER_{y,i,j}$ = Emission reductions by improved cook stove of type i and batch j during year y in t CO₂e

$$ER_{y,i,j} = B_{y,saving,i,j} \times f_{NRB,y} \times NCV_{wood\ fuel} \times (EF_{wf,CO_2} + EF_{wf,non\ CO_2}) \times N_{y,i,j} \times 0.95 \quad \text{Equation (2)}$$

Where:

- $B_{y,saving,i,j}$ = Quantity of woody biomass that is saved in tonnes per improved cook stove of type i and batch j during year y
- $f_{NRB,y}$ = Fraction of woody biomass that can be established as non-renewable biomass (f_{NRB}). The value is calculated to be 0.87.
- $NCV_{wood\ fuel}$ = Net calorific value of the non-renewable woody biomass that is substituted or reduced (IPCC default for wood fuel, 0.0156 TJ/tonne)²
- EF_{wf,CO_2} = CO₂ emission factor for the use of wood fuel in baseline scenario (IPCC default for wood fuel, 112 tCO₂/TJ)³
- $EF_{wf,non\ CO_2}$ = Non-CO₂ emission factor for the use of wood fuel in baseline scenario (IPCC default for wood fuel, 26.23 tCO₂/TJ)⁴
- $N_{y,i,j}$ = Number of improved cook stoves of type i and batch j operating during year y
- 0.95 = Discount factor to account for leakage

The quantify of woody biomass saved due to implementation of improved cook stoves can be estimated by one of the following options⁵ set out in Equations 3 and 4:

² AMS II.G. Version 11

³ 2006 IPCC Guidelines for National Greenhouse Gas Inventories; Chapter 2 Stationary Combustion

⁴ 2006 IPCC Guidelines for National Greenhouse Gas Inventories; Chapter 2 Stationary Combustion

⁵ The option to determine the $B_{y,savings,i,j}$ shall be decided prior to validation of the project.

$$B_{y,savings,i,j} = B_{old} \times \left(1 - \frac{\eta_{old}}{\eta_{new,i,j}}\right) \quad \text{Equation (3)}$$

$$B_{y,savings,i,j} = B_{y=1,new,i,survey} \times \left(\frac{\eta_{new,y,i,j}}{\eta_{old}} - 1\right) \quad \text{Equation (4)}$$

Where:

B_{old} = Annual quantity of woody biomass that would have been used in the absence of the project activity (in tonnes per device) to generate useful thermal energy equivalent to that provided by the improved cook stove. The value of Bold can be sourced from historical data or baseline surveys. Alternatively, a default value of 0.5t/capita/year may be used.

η_{old} = Efficiency of baseline cookstove. The value is assumed to be 11%.

$\eta_{new,y,i,j}$ = Efficiency of the improved cook stove type i and batch j determined through water boiling test (WBT). Alternatively, efficiency may be determined using Equation 5.

$B_{y=1,new,i,survey}$ = Annual quantity of woody biomass used by improved cook stoves in tonnes per device of type i and batch j, determined in the first year of the implementation of the project through a sample survey. The value is assumed to be 4.24 kg/device/day or equal to 1.55 tonnes/device/year.

We choose equation 4 to estimate the quantity of woody biomass saved due to implementation of improved cookstoves.

$$\eta_{new,y,i,j} = \eta_p \times (DF_n)^{y-1} \times 0.94 \quad \text{Equation (5)}$$

Where:

η_p = Efficiency of project stove (fraction) at the start of project activity; the value is 34.0% as per the specifications provided by manufacturer

$(DF_n)^{y-1}$ = Discount factor to account for efficiency loss of project cookstove per year of operation (fraction). This value may be based on actual monitoring or based on manufacturer's declaration on expected loss in efficiency or through publicly available literature on relevant industry standards. Alternatively default value of 0.99 efficiency loss per year can be considered.

0.94 = Adjustment factor to account for uncertainty related to project cookstove efficiency test

The Equation 6 in the applied methodology is used when the project households continue to use baseline cookstoves along with improved cookstoves. Since only the firewood used in the ICSs implemented by the project will be taken into account for calculation of emission reductions, the Equation 6 is not applicable in PD for ex-ante estimation.

The Equation 7 and 8 in the applied methodology is used for project stoves replacing fossil fuel with renewable biomass. The project involves replacing low thermal efficient wood fuel combusted cookstoves with high thermal efficient wood fuel combusted cookstoves only. Relatively rich households who can afford fossil fuel will not be involved in the donation project. Thus Equation 7 and 8 are not applicable.

For ex-ante calculation purpose, the assumption below is applied.

$$\eta_p = 34.0\%;$$

$$DF_n = 0.99;$$

Therefore, $\eta_{nwe,y,i,j}$ is calculated as below:

Age(y)	$\eta_{nwe,y,i,j}$
1	31.96%
2	31.64%
3	31.32%
4	31.01%
5	30.70%
6	30.39%
7	30.09%
8	29.79%
9	29.49%
10	29.20%

The project will install up to 200,000 ICSs in 2 years, hence 100,000 ICSs each year. The life span of ICS is 10 years. In the sixth year of the ICSs installed, the project proponent will provide a new ICS to Households or repair existing ICS without cost. The annual loss rate is assumed to be 10%.

Therefore, the $N_{y,i,j}$ and $\eta_{nwe,y,i,j}$ are estimated as below:

	ICSs installed in year 1&6	ICSs installed in year 2&7
--	----------------------------	----------------------------

	Year(y)	$N_{y,i,j}$	$\eta_{new,y,i,j}$	$N_{y,i,j}$	$\eta_{new,y,i,j}$
First-time Distribution	1	100000	31.96%		
	2	90000	31.64%	100000	31.96%
	3	80000	31.32%	90000	31.64%
	4	70000	31.01%	80000	31.32%
	5	60000	30.70%	70000	31.01%
	6	50000	30.39%	60000	30.70%
	7	0	30.09%	50000	30.39%
Second-time Distribution	6	100000	31.96%	0	0.00%
	7	90000	31.64%	100000	31.96%
	8	80000	31.32%	90000	31.64%
	9	70000	31.01%	80000	31.32%
	10	60000	30.70%	70000	31.01%

$B_{y=1,new,i,survey} = 4.24 * 365 / 1000 = 1.55$ tonnes/device/year according to ex-ante estimation.

The expected emission reduction is as below:

Year(y)	ERs from ICSs installed in year 1&2	ERs from ICSs installed in year 2&7	Total
1	262,783	0	262,782
2	465,797	262,783	728,579
3	407,695	465,797	873,491
4	351,235	407,695	758,929
5	296,393	351,235	647,627
6	384,355	296,393	680,748
7	465,797	384,355	850,152
8	407,695	465,797	873,491
9	351,235	407,695	758,929
10	296,393	351,235	647,627

The applied methodology does not account for baseline and project emissions separately, but instead quantifies emission reductions as a function of the reduction in the amount of non-renewable biomass fuel consumption in the efficient project stoves as compared to baseline stoves. The ex-ante calculation is shown in the table below.

Year	Estimated baseline emissions or removals (tCO ₂ e)	Estimated project emissions or removals (tCO ₂ e)	Estimated leakage emissions (tCO ₂ e)	Estimated net GHG emission reductions or removals (tCO ₂ e)
05/11/2022-31/12/2022	N.A.	N.A.	0	6,408
01/01/2023-31/12/2023	N.A.	N.A.	0	335,523
01/01/2024-31/12/2024	N.A.	N.A.	0	785,838
01/01/2025-31/12/2025	N.A.	N.A.	0	855,600
01/01/2026-31/12/2026	N.A.	N.A.	0	741,547
01/01/2027-31/12/2027	N.A.	N.A.	0	652,799
01/01/2028-31/12/2028	N.A.	N.A.	0	707,202
01/01/2029-31/12/2029	N.A.	N.A.	0	853,796
01/01/2030-31/12/2030	N.A.	N.A.	0	855,600
01/01/2031-31/12/2031	N.A.	N.A.	0	741,547
01/01/2032-04/11/2032	N.A.	N.A.	0	546,491
Total	N.A.	N.A.	0	7,082,351

5 MONITORING

5.1 Data and Parameters Available at Validation

Data / Parameter	$f_{NRB,y}$
Data unit	Fraction

Description	Fraction of woody biomass saved by the project activity during year y that can be established as non-renewable biomass
Source of data	Calculated
Value applied	0.87
Justification of choice of data or description of measurement methods and procedures applied	As per the "TOOL30: Calculation of the fraction of non-renewable biomass, version 4.0". Please refer to the Philippines f_{NRB} calculation sheet.
Purpose of Data	Calculation of emission reductions
Comments	.

Data / Parameter	$NCV_{wood\ fuel}$
Data unit	TJ/tonne
Description	Net calorific value of the non-renewable woody biomass that is substituted or reduced
Source of data	2006 IPCC Guidelines for National Greenhouse Gas Inventories; Volume 2 Energy, Chapter 1 Introduction: Table 1.2 Default net calorific values (NCVs) and lower and upper limits of the 95 percent confidence intervals.
Value applied	0.0156
Justification of choice of data or description of measurement methods and procedures applied	IPCC default value
Purpose of Data	Calculation of emission reductions
Comments	

Data / Parameter	EF_{wf,CO_2}
Data unit	tCO ₂ /TJ
Description	CO ₂ emission factor for the use of wood fuel in baseline scenario
Source of data	2006 IPCC Guidelines for National Greenhouse Gas Inventories; Volume 2 Energy, Chapter 2 Stationary Combustion: Table 2.5 Default emission factors for stationary combustion in the

	residential and agriculture/forestry/fishing/fishing farms categories.
Value applied	112
Justification of choice of data or description of measurement methods and procedures applied	IPCC default value
Purpose of Data	Calculation of emission reductions
Comments	

Data / Parameter	$EF_{wf,non\ CO_2}$
Data unit	tCO ₂ /TJ
Description	Non-CO ₂ emission factor for the use of wood fuel in baseline scenario
Source of data	2006 IPCC Guidelines for National Greenhouse Gas Inventories; Volume 2 Energy, Chapter 2 Stationary Combustion
Value applied	26.23
Justification of choice of data or description of measurement methods and procedures applied	IPCC default value
Purpose of Data	Calculation of emission reductions
Comments	

Data / Parameter	η_{old}
Data unit	Fraction
Description	Efficiency of baseline cookstove
Source of data	<ul style="list-style-type: none"> • Default value: 0.1 or 0.2; or • Surveyed prior to implementation of project activity
Value applied	0.11 for ex-ante estimate, it will be fixed after baseline survey
Justification of choice of data or description of	(a) A default value of 0.1 shall be used if baseline device is a three-stone fire using firewood (not charcoal), or a conventional

measurement methods and procedures applied	<p>device with no improved combustion air supply or flue gas ventilation, that is without a grate or a chimney.</p> <p>(b) A default value of 0.2 shall be used for other types of devices.</p> <p>(c) If more than one type of baseline device is being replaced in the project region, weighted average values (taking the amount of woody biomass consumed by each device as the weighting factor) shall be used.</p> <p>(d) If this parameter is surveyed, project promoters may use simplified guidelines stated under Option (b) in Section 8.4 above for arriving at the minimum sample size.</p>
Purpose of Data	Calculation of emission reductions
Comments	

Data / Parameter	η_p
Data unit	Fraction
Description	Efficiency of project stove at the start of project activity.
Source of data	Manufacturer's Technical Specification
Value applied	34.0%
Justification of choice of data or description of measurement methods and procedures applied	This parameter shall be determined ex-ante
Purpose of Data	Calculation of emission reductions
Comments	

Data / Parameter	$\eta_{\text{new},y,i,j}$
Data unit	Fraction
Description	Efficiency of the improved cookstove type i and batch j implemented as part of the project activity
Source of data	Calculation

Value applied	<table> <tr> <th>Age(y)</th><th>$\eta_{Inwe,y,i,j}$</th></tr> <tr><td>1</td><td>31.96%</td></tr> <tr><td>2</td><td>31.64%</td></tr> <tr><td>3</td><td>31.32%</td></tr> <tr><td>4</td><td>31.01%</td></tr> <tr><td>5</td><td>30.70%</td></tr> <tr><td>6</td><td>30.39%</td></tr> <tr><td>7</td><td>30.09%</td></tr> <tr><td>8</td><td>29.79%</td></tr> <tr><td>9</td><td>29.49%</td></tr> <tr><td>10</td><td>29.20%</td></tr> </table>	Age(y)	$\eta_{Inwe,y,i,j}$	1	31.96%	2	31.64%	3	31.32%	4	31.01%	5	30.70%	6	30.39%	7	30.09%	8	29.79%	9	29.49%	10	29.20%
Age(y)	$\eta_{Inwe,y,i,j}$																						
1	31.96%																						
2	31.64%																						
3	31.32%																						
4	31.01%																						
5	30.70%																						
6	30.39%																						
7	30.09%																						
8	29.79%																						
9	29.49%																						
10	29.20%																						
Justification of choice of data or description of measurement methods and procedures applied	<p>To adopt Option V given in the methodology:</p> <p>Efficiency of the improved cookstoves to be estimated using equation 4 above where loss in efficiency per year is calculated, and therefore this parameter does not need to be monitored</p>																						
Purpose of data	Calculation of emission reductions																						
Comments																							

5.2 Data and Parameters Monitored

Data / Parameter	$N_{y,i,j}$
Data unit	Number
Description	Number of project devices of type i and batch j operating during year y
Source of data	Monitoring

Description of measurement methods and procedures to be applied	Measured directly or based on a representative sample. Sampling standard shall be used for determining the sample size to achieve 90/10 confidence precision according to the latest version of Standard for sampling and surveys for CDM project activities and programme of activities.
Frequency of monitoring/recording	At least once every two years
Value applied	For ex-ante emission reduction calculation, it is assumed that the project will distribute up to 200,000 ICSs and the installation/distribution of ICSs to be implemented in 2 years with each year comprises of 100,000 ICSs.
Monitoring equipment	Monitoring survey
QA/QC procedures to be applied	
Purpose of data	Calculation of emission reductions
Calculation method	Proportion of operational stoves obtained from the survey is multiplied by the total commissioned stoves to arrive at this value
Comments	

Data / Parameter	$B_{y=1,new,i,j,survey}$
Data unit	tonnes
Description	Quantity of woody biomass used by project devices in tonnes per device of type i
Source of data	Survey
Description of measurement methods and procedures to be applied	<p>Minimum sample size of each type i and batch j should be in line with the latest version of Standard for sampling and surveys for project activities and programmes of activities or guidelines provided in section 8.4 option (b).</p> <p>Determined in the first year of the introduction of the devices (e.g., during the first year of the crediting period, $y=1$) through measurement campaigns at representative households and/or sample survey. Sample surveys to estimate this parameter, that are solely based on questionnaires or interviews (i.e. that do not</p>

	<p>implement measurement campaigns) may only be used if the following conditions are satisfied :</p> <p>(a) Baseline cookstoves have been completely decommissioned and only improved cookstoves are exclusively used in the project households;</p> <p>(b) If multiple devices are used in the project, it is possible from the results of the survey questions to clearly differentiate the quantity of firewood being used by each device. In other words, if more than one device, or another device that consumes firewood, are in use in project households, then the sample survey needs to distinguish the quantity of firewood used by the project device and the other devices that use firewood.</p>
Frequency of monitoring/recording	Determined in the first year of project implementation
Value applied	For ex-ante emission reduction calculation, it is assumed as 4.24kg/device/day, equal to 1.55 tonnes/device/year.
Monitoring equipment	Monitoring survey
QA/QC procedures to be applied	
Purpose of data	Calculation of emission reductions
Calculation method	
Comments	

Data / Parameter	Life span
Data unit	Years
Description	Project promoters to state the operating lifetime of project device for projects opting Equation 5 for determining project stove efficiency.
Source of data	Manufacturer's Technical Specification
Description of measurement methods and procedures to be applied	

Frequency of monitoring/recording	Once at the time of Project stove installation
Value applied	10
Monitoring equipment	
QA/QC procedures to be applied	
Purpose of data	Calculation of emission reductions
Calculation method	
Comments	

5.3 Monitoring Plan

The local partners of Iceberg (i.e. project proponent) are in charge of the implementation of the monitoring plan and reporting to the project proponent. The project proponent is in charge of designing the monitoring plan and completing the monitoring report. Sampling survey will be applied for monitoring.

(a) Sampling Plan

As per the Standard for Sampling and Surveys for CDM Project Activities and Programmes of Activities, Version 09.0:

Sampling design

(1) Objectives and reliability requirements

The objective is determining the value of parameter $N_{y,i,j}$ and $B_{y=1,new,i,survey}$ during the crediting period, and with a 90/10 confidence/precision compliance with the applied methodology.

The following parameters may be determined by sampling:

Parameter	Description	Frequency
$N_{y,i,j}$	Number of project devices of type i and batch j operating during year y	Biennial
$B_{y=1,new,i,survey}$	Quantity of woody biomass used by project devices in tonnes per device of type i and batch j	Determined in the first year of project implementation

(2) Target population

The target population will be the complete set of appliances (ICS) deployed under the project.

(3) Sampling method and size

As per the applied methodology, the following guidelines will be applied to calculate the sample size:

- Project target population < 300: Minimum sample size 30
- Project target population 300 1000: Minimum sample size 10% of group size
- Project target population > 1000: Minimum sample size 100

(b) Data to be collected

Besides the above parameters, the following data need to be collected as per the applied methodology:


- Date of distribution
- Geographic area of distribution
- Model/type of project technology distributed
- Quantity of project technologies distributed
- Name and telephone number (if available), and address of recipient
- unique identification alpha/numeric ID for each device that is sold/distributed

The information collected will be stored in the electronic database for 2 years after the end of crediting period.

Quality assurance/Quality control

Training about monitoring plan will be provided to local partners, including survey method, data record and analysis. The monitoring plan will be carried out by qualified personnel trained for quality assurance and quality control. The project proponent will inspect local partners to confirm that the personnel are qualified and the monitoring plan has been properly implemented. The data collected may be cross checked by the project proponent or a third-party organization.

The organizational structure for monitoring is shown as the bellow:

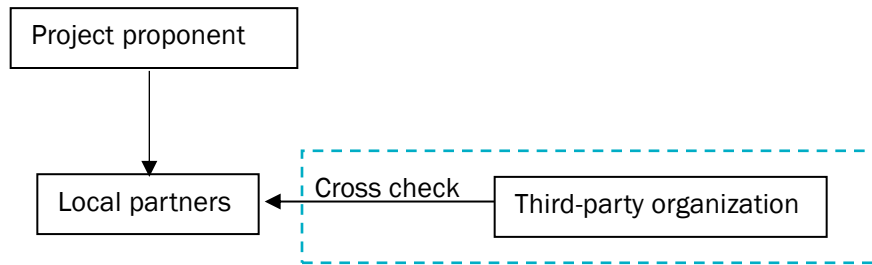

(c) Implementation plan

The main survey methods applied in the sampling plan include hardcopy questionnaires, online questionnaires, face to face interview and telephone interview. The potential of refusals and other means of non-responses will be taken into account for calculation of sample size. Meanwhile, in order to minimize the rates of non-response and answer bias, the questionnaires will be designed by professional team and widely tested before use.

Any non-conformances with the validated monitoring plan will be recorded and analysed. If they are in accordance with the applied methodology and other related rules, a change may be conducted in the validated monitoring plan. Otherwise, revision and improvement will be conducted in the monitoring. The related ERs will not be claimed in the monitoring report until the non-conformance has been corrected in the latter case.